


CASTLEWALL
Tile, Stone, and Terrazzo Contractors

CASTLEWALL



GRANTLEY ADAMS INTERNATIONAL AIRPORT BARBADOS, WEST INDIES

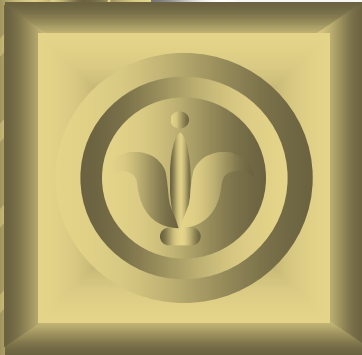



PROJECT SYNOPSIS

The project started for us on June 2001 with a pre-tender site visit. Once the tender was evaluated and accepted we traveled to Copenhagen, Denmark to meet the head of this successful General Contractor and complete the transaction.

It was estimated that from start to completion, construction would take approximately 30 months. During terminal construction, the airport should remain fully operational, and as a consequence the project was planned to be executed in four different construction phases.

The Project comprised:

Construction of 250.000 square feet including...

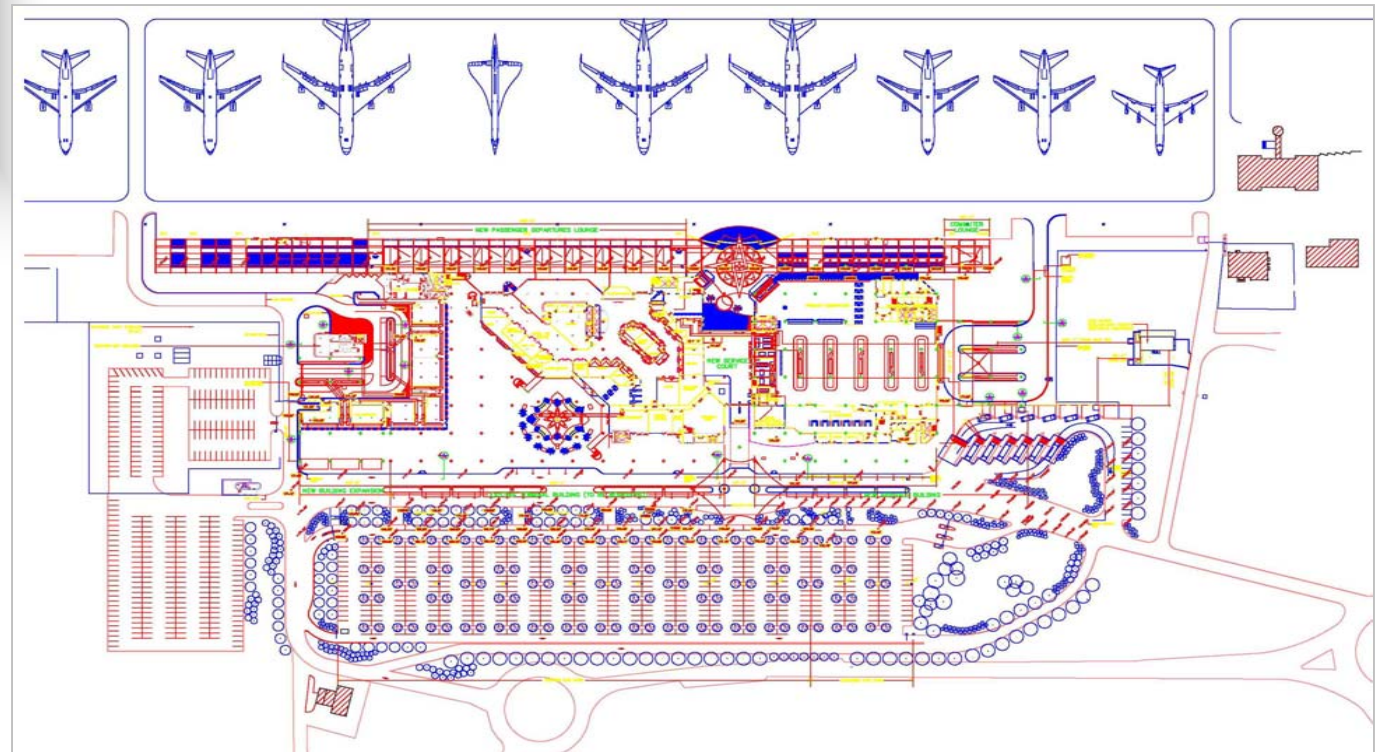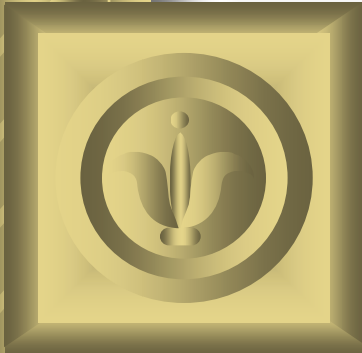

● New Arrival Terminal, including:

Two Airside Entrances Facility in 12,000 square feet area that includes two architectural features in conventional terrazzo of six different colours on mortar bed that utilized 5,500 lineal feet of zinc and plastic divider strips.



- New Regional Flights Facilities:
Includes public washrooms and architectural feature at the Main Hall.



- Water Fountains:

Involves:

More than 1300 lineal feet of concrete walls covered with Epoxy Terrazzo.

Pre-cast Terrazzo Caps

Pre-cast Terrazzo Tiles onto piers due the difficulty of direct application.



- Departure Terminal:
30.000 square feet of tax-free shopping area:



GRANTLEY ADAMS INTERNATIONAL AIRPORT
PERSPECTIVE OF RETAIL MALL
SYGHER/MUELLER INTERNATIONAL INC. QUEEN'S QUAY ARCHITECTS INTERNATIONAL INC. MARVIN A. AWAN ARCHITECTS



CASTLEWALL

Tile, Stone, and Terrazzo Contractors

Additional ticketing area:



GRANTLEY ADAMS INTL
Sydney/Muller International



- Landside Gallery:

Included architectural terrazzo features on conventional terrazzo on mortar bed that utilized 765 lineal yards of divider strips and epoxy terrazzo onto concrete substrates.



- Refurbishment of Existing Terrazzo Floor :

Involved 50.000 square feet of terrazzo floor on ground and mezzanine levels that accommodates new offices for the airport management staff as well as new airline executive lounges.

